


britelight



h2o

Waterproof fixture

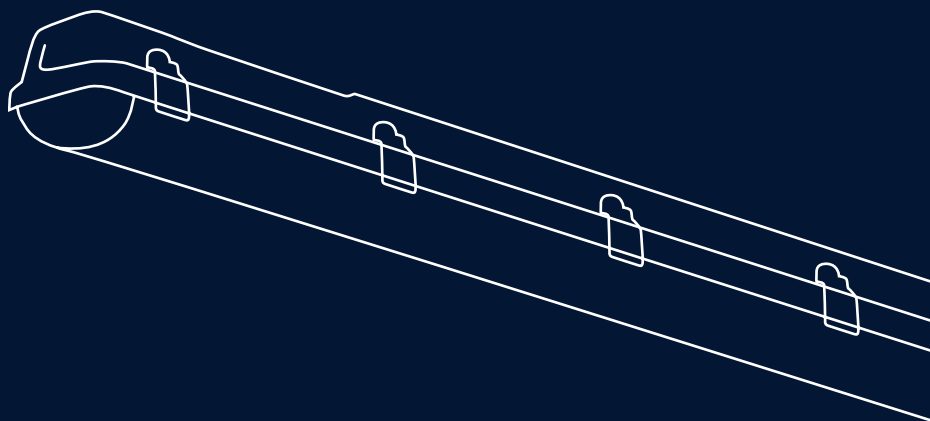

Fixed Output



>70.000 hrs
at L80B10



L100/CLO
optional



PowerFactor
>0.9



LED



Certified



Sensor
optional

About the h2o

The Britelight h2o is a waterproof fixture. The fixture is equipped with a diffuse shield, ensuring an evenly distributed light.


The h2o is equipped with efficient LED technology, achieving an efficiency of over 130 lumens per watt. The light beam of 5,700 Kelvin provides a bright light image in the space.

The h2o is an easy-to-install fixture thanks to its innovative plastic housing. This also makes the lamp sturdy: IK10 and waterproof: IP65.



CE IP65 IK10

Light beams



Wide

Dimensions



Height: 111 mm

Length: 95 mm

Length: variabel

Versions

The options under the bullets can be filled in at the places in the table. Additions count as extras behind the code.

Color fixture	●	Optics	●	Driver	●	Additions	●
Opal	W	Optics 90 degrees	OWI	Fixed - 70.000 hrs	F7	Emergency unit	NOOD



→ 615 mm

Code	●	●	●	●	Length mm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLWDH2 0615 6500 840	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	615	>70.000	4.000	>80	2.825	16	177-189
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.090	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.070	40	
BLWDH2 0615 6500 857	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	615	>70.000	5.700	>80	3.040	16	179-191
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.140	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.140	40	



→ 1175 mm

Code	●	●	●	●	Length mm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLWDH2 1175 6500 840	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1175	>70.000	4.000	>80	2.825	16	177-189
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.090	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.070	40	
BLWDH2 1175 6500 857	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1175	>70.000	5.700	>80	3.040	16	179-191
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.140	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.140	40	



→ 1455 mm

Code	●	●	●	●	Length mm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLWDH2 1455 6500 840	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1455	>70.000	4.000	>80	2.825	16	177-189
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.090	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.070	40	
BLWDH2 1455 6500 857	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	1455	>70.000	5.700	>80	3.040	16	179-191
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					5.140	27	
	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>					7.140	40	