


Multiwall square



Fixed Output

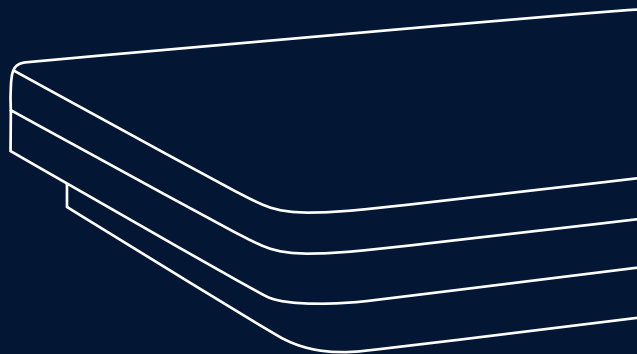

>50.000 hrs
at L80B10



L100/CLO
optional



PowerFactor
>0.9



LED



Internal



Sensor
optional

About the Multiwall square


The Britelight Multiwall square is suitable for ceilings and walls. Available in three sizes. With a simple switch, you can alternate between the light color and/or the light intensity.

For extra convenience, opt for the integrated motion detector. It is also possible to equip the lamp with a decentralized emergency unit.




CE IP54

Light beams



Dimensions

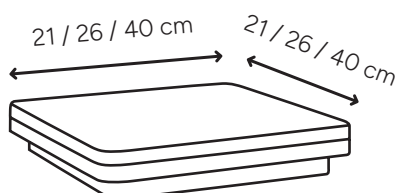

Versions

The options under the bullets can be filled in at the places in the table. Additions count as extras behind the code.

Color fixture	●	Optics	●	Driver	●	Additions	●
Opal	W	Optics 90 degrees	OWI	Fixed - 50.000 hrs	F7	Emergency unit	NOOD



→ 21 x 21 cm

Code		Size cm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLMUWS 2121 2500		21 x 21	50.000	3.000 / 4.000	>80	1.100	10	104-110
	2.100					18		
	2.500					24		



→ 26 x 26 cm

Code		Size cm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLMUWS 2626 2500		26 x 26	50.000	3.000 / 4.000	>80	1.100	10	104-110
	2.100					18		
	2.500					24		



→ 40 x 40 cm

Code		Size cm	Lifetime hrs	Temp. K	Color CRI	Output lm	Power W	Efficacy lm/W
BLMUWS 4040 2500		40 x 40	50.000	3.000 / 4.000	>80	1.100	10	104-110
	2.100					18		
	2.500					24		